




Feature

DN	DN15~200	
PN Mpa	1.6	
Temp (°C)	≤200	
Test MPa	Seal (Water)	1.8
	Shell (Water)	2.4
Medium	Water/vapour/oil	

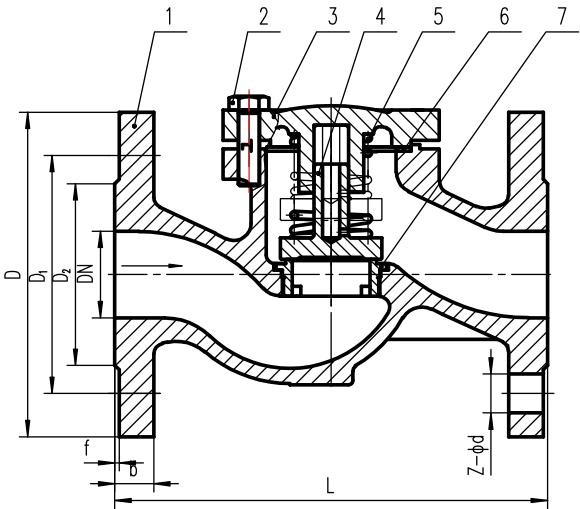

No.	Name	Material
1	Body	GG25
2	Bolt	Stell#35
3	Bonnet	SS304
4	Disc+Disc ring	13Cr(DN15-DN50)GG25+13Cr(DN65-Dn200)
5	Spring	SS304
6	Gasket	08+Graphite
7	Seat ring	13Cr

DN	L	D	D ₁	D ₂	b-f	Z-Φd
15	130	95	65	46	14-2	4-Φ14
20	150	105	75	56	16-2	4-Φ14
25	160	115	85	65	16-2	4-Φ14
32	180	140	100	76	18-2	4-Φ14
40	200	150	110	84	18-2	4-Φ14
50	230	165	125	99	20-2	4-Φ14
65	290	185	145	118	20-2	4-Φ14
80	310	200	160	132	22-2	4-Φ14
100	350	220	180	156	24-2	4-Φ14
125	400	250	210	184	26-2	4-Φ14
150	480	285	240	211	26-2	4-Φ14
200	600	340	295	266	30-2	4-Φ14